


# MOVFR Installation Instructions

For use when connecting Tri-Tronics InvisiGuard cables to G.A.L. MOVFR door operators.

Note: If Tri-Tronics InvisiGuard Cable includes an M8 male connector, the male connector must be removed and the conductors prepped as shown:

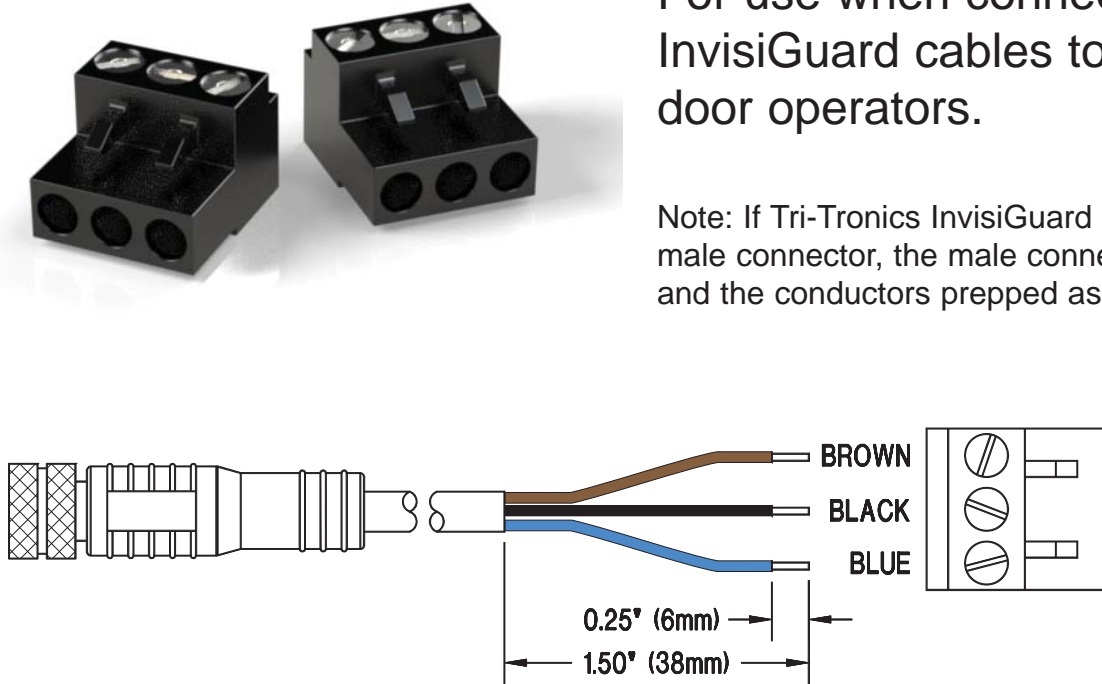

**TIGHTENING TORQUE:**  
3.5-4.4 IN. LBS  
(0.4-0.5 Nm)

**SCREWDRIVER BLADE:**  
0.6 X 3.5mm