


Function	Connector Pin No.	Wire Color
Supply voltage	A	White
no connection	B	-
Common	C	Green
Output A	D	Black
Output Z	E	Brown
Output B	F	Red

Cable Assembly Part No. is C6-xx-yy M122
 where xx is the number of conductors
 yy is the cable length in feet

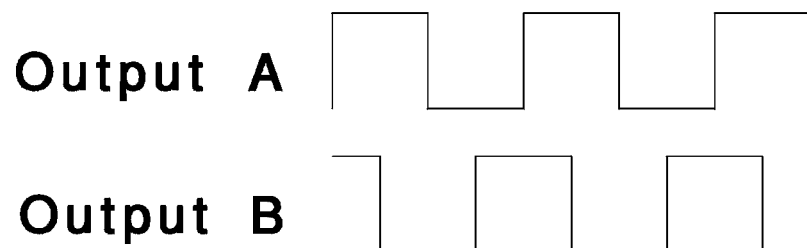

Output waveshape & phasing for clockwise rotation when viewed from shaft end farthest from the connector. (note: output B leads output A by 90°)

See the RS datasheet for more information. See also M80 option.

Rev	Description	Date	Tolerances	M122: RS encoder with modified wiring (ECCI PU863, PU868)		
			.XXXX ± .0005 .XXX ± .005 .XX ± .01 .X ± .015 Fractions ± 1/32 Angles ± 15 min. Runout ± .003 <small>Unless otherwise specified</small>	BY: TRD	MAT'L: na	
				DATE: 4/23/99	FINISH: na	SCALE: na
				PHOTOCRAFT, Inc. Elburn, Illinois 8A122		