
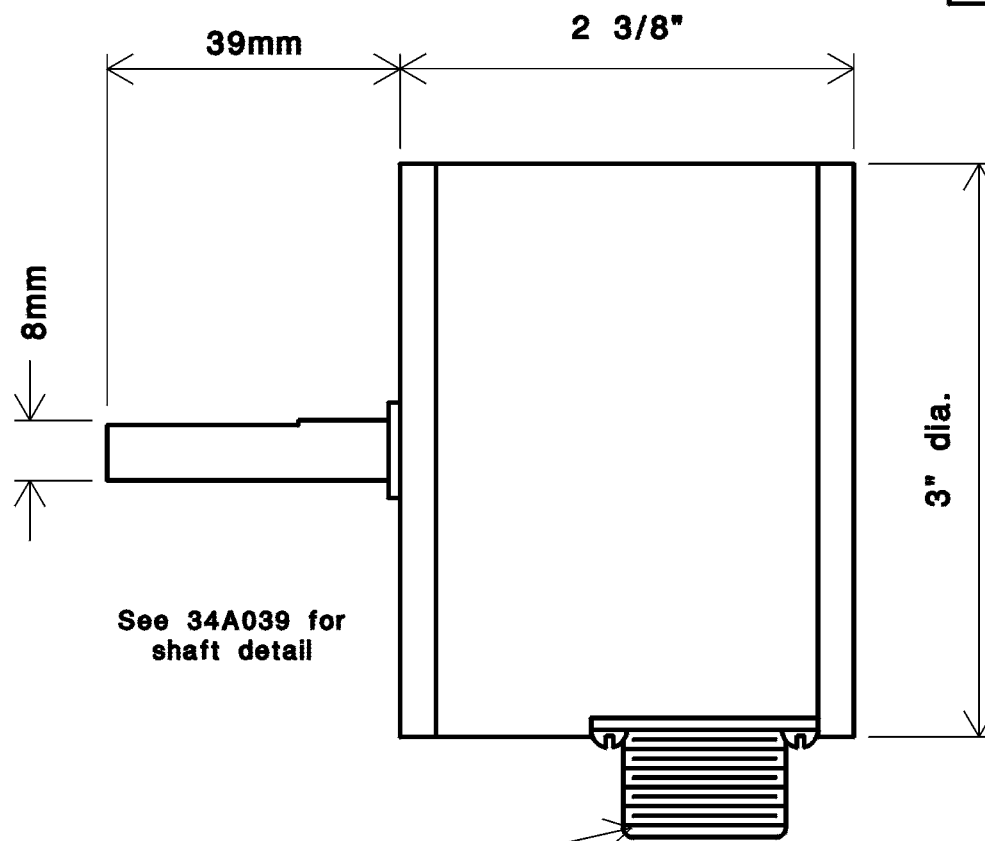


8A152

(4) 8-32 bolt holes
9/32" deep on
1.50" dia. bolt circle

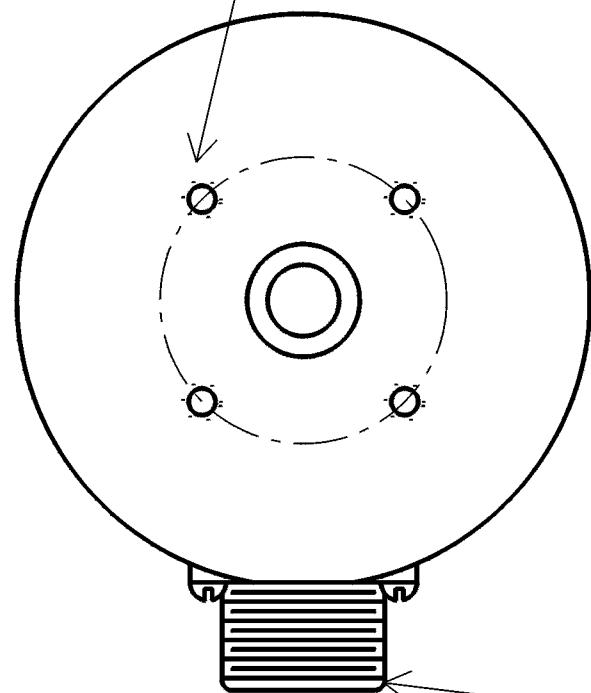

See 34A039 for
shaft detail

Amphenol 97-3102A-14S-5S
5-Pin Connector
(or equivalent)

Bearing Life (L_{10}) = 36×10^6 /RPM (Axial load = 15 lbs, Radial load = 25 lbs)

Rev	Description	Date	Tolerances	M152: RL with 8mm x 39mm shaft		
			.XXXX $\pm$.0005	BY: TRD	MAT'L: .3742/.3745" RD 303 SS	
			.XXX $\pm$.005	DATE: 10/14/02	FINISH: none	SCALE: 1 : 1
			.XX $\pm$.01	PHOTOCRAFT, Inc. Elburn, Illinois 8A152		
			.X $\pm$.015			
			Fractions $\pm$ 1/32			
			Angles $\pm$ 15 min.			
			Runout $\pm$.003			
			Unless otherwise specified			