


Function	Pin	Wire Color
Common	Α	Black
Supply voltage	В	Red
Output Z	С	Brown
Output A	D	White
Output B	Ε	Green
Case ground	F	Shield

See the RJ datasheet for more information

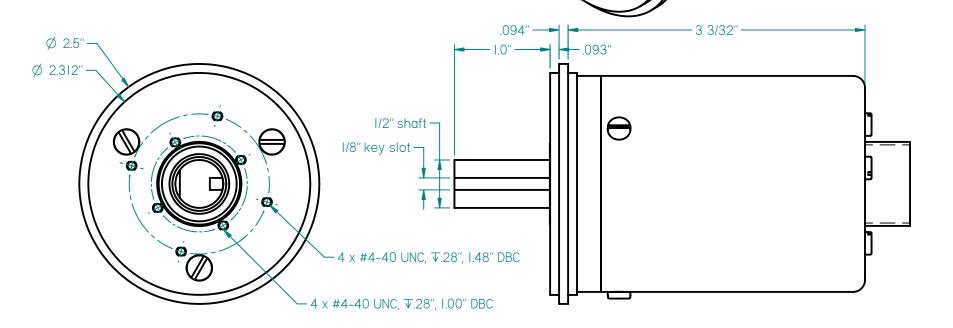

8AI69

F	Rev	Description	Date	This information is approved only if it is stamped "APPROVED", signed, and dated.	Tolerances	MI69: RJ enc	oder with slotted I/2" shaft, MB-75	adapter, and
				This document is provided for a specific purpose and the disclosed	.XXXX ± .0005 .XXX ± .005		special wiring (ECCI 0N25-1024)	•
				information remains our property. It may not be disclosed, copied, or reproduced, except for the specific	.XX ± .01 c .X ± .015	ву: TRD	Mat'l:	
				purpose, without Photocraft's prior approval. This notice must appear on any copy or reproduction of this	Fractions ± 1/32 Angles ± 15 min	Orig. Date: 7/23/04	Finish:	Scale:   :
				document.		Photocra	ft Inc 602 E North St, Elburn, IL, USA	8AI69