


Electrical Connections

Pin	Color	Function
1	White	output A
2	Green	output B
3	Yellow	output Z
4	Red	+vdc
5	Black	com
6	Blue	output \bar{A}
7	Brown	output \bar{B}
8	Orange	output \bar{Z}

8-pin 16mm connector

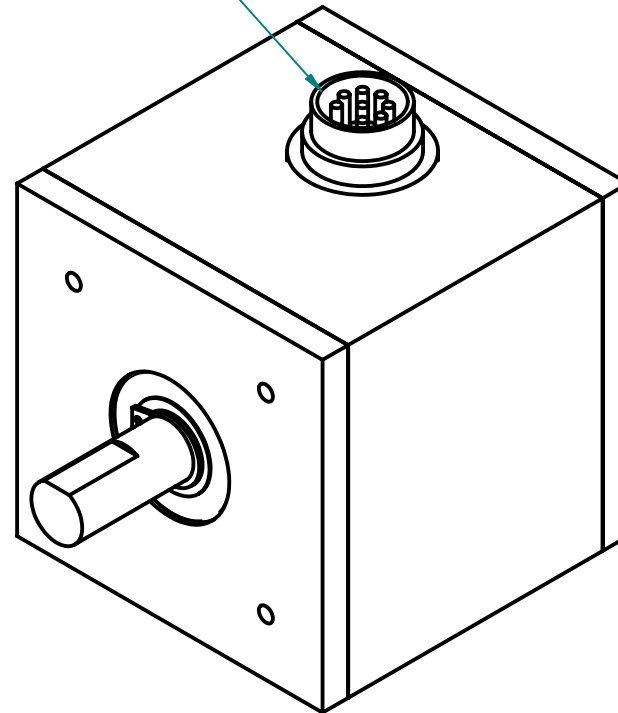

See the RS datasheet for more information

Rev	Description	Date	This information is approved only if it is stamped "APPROVED", signed, and dated.	Tolerances	MI88: RS encoder with 8-pin 16mm connector		
			This document is provided for a specific purpose and the disclosed information remains our property. It may not be disclosed, copied, or reproduced, except for the specific purpose, without Photocraft's prior approval. This notice must appear on any copy or reproduction of this document. © 2005, Photocraft Inc.	.XXX ± .0005 .XX ± .005 .X ± .01 X ± .015	By: TRD	Mat'l:	
				Fractions ± 1/32 Angles ± 15 min Runout ± .003	Orig. Date: 1/26/06	Finish:	Scale: 1 : 1
				Unless otherwise specified	Photocraft Inc 602 E. North Street, Elburn IL 60119, USA www.photocraftencoders.com		
							8A188